




Model 3ZB for Bass Guitar
Drawing 3ZB-2APBV3B


Audere Audio www.audereaudio.com

Wiring for Balance, Stacked and Individual Active Tone Pots

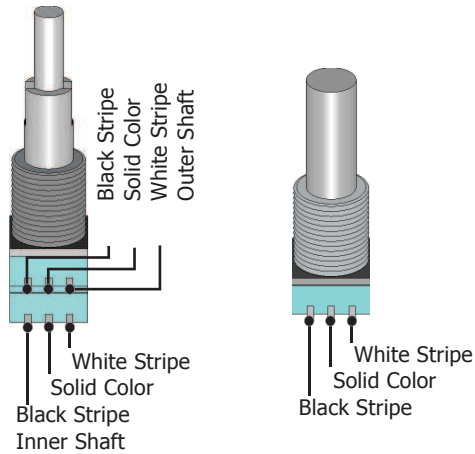

Wire Jacket Colors:

- Blue → Bass
- Grey → Mid
- Violet → Treble
- Orange → Balance

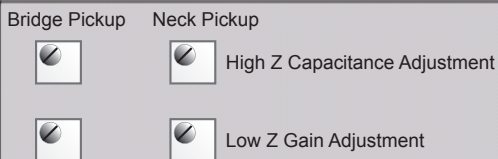

Rev 39443

Active/Passive Switch - Terminal Number/Location and Attached Wire

1 White	4 Black on White	7 Blue on White	10 Green on White
2 Yellow on Grey	5 Bridge Pickup Hot	8 Neck Pickup Hot	11 Pickups Common
3 Short to 6&9	6 Short to 3&9	9 Short to 3&6	12 Grey on White

